

RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128

Felten Property Assessment Team

866.568.7853 | www.fpat.com



CERTIFICATION OF WINDSTORM MITIGATION AFFIDAVIT(S)

This is to certify the enclosed Windstorm Mitigation Inspection report prepared for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc. is the result of work performed by Felten Property Assessment Team and one or more of the individuals listed below.

In addition, we certify that, to the best of our knowledge and belief:

- > All facts contained in this report are true and accurate.
- > FPAT has no present or prospective interest in the subject property of this report, and also has no personal interest with respect to the parties involved.
- > FPAT has no bias with respect to the subject property of this report or to the parties involved with this assignment.
- Our engagement in this assignment was not contingent upon producing or reporting predetermined results.
- Our compensation is not contingent on any action or event resulting from this report.
- We have the knowledge and experience to generate accurate windstorm mitigation affidavit(s) for insurance purposes on all buildings contained within this report.
- We have performed a physical inspection of the subject risk(s) contained in this report.
- ➤ This report meets or exceeds the standards of the Citizens Inspection Outreach Program.

<u>Key Staff:</u>

Brad Felten

Sr. Adjuster # E149535
Flood Certification # 06060373
Certified Wind & Hurricane Mitigation
Inspector

Ian Wright


Sr. Adjuster # W273704 Certified Wind & Hurricane Mitigation Inspector

John Felten

Sr. Adjuster # D075772 Flood Certification # 05030007 Certified Building Contractor # CBC1255984 Certified Wind & Hurricane Mitigation Inspector




AERIAL MAPS OF PROPERTY

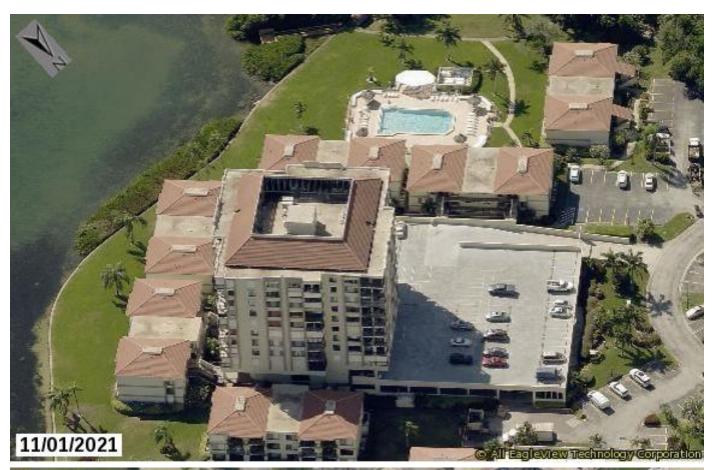





AERIAL MAPS OF PROPERTY

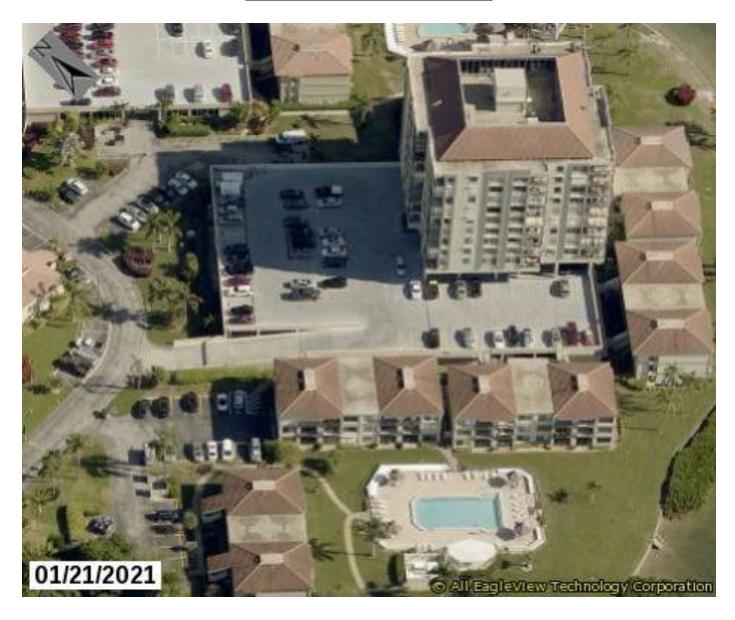



OIR-B1-1802 RECAPITULATION OF BUILDING MITIGATION FEATURES

Palma Del Mar No. 5 Of St. Petersburg

Building	Roof Covering	Roof Deck Attachment	Roof-Wall Attachment	Roof Shape	SWR	Opening Protection
6372 Palma Del Mar Blvd S, Tower	One or more roof coverings do not meet the minimum requirements	Reinforced Concrete Roof Deck	Structural	Flat Roof	No	None or Some Glazed Openings
6372 Palma Del Mar Blvd S, Units 101-304	One or more roof coverings do not meet the minimum requirements	No Attic Access	No Attic Access	Other Roof	No	None or Some Glazed Openings
6372 Palma Del Mar Blvd S, Units 105-308	One or more roof coverings do not meet the minimum requirements	No Attic Access	No Attic Access	Other Roof	No	None or Some Glazed Openings
6372 Palma Del Mar Blvd S, Units 109-312	One or more roof coverings do not meet the minimum requirements	Level B	Toe Nails	Other Roof	No	None or Some Glazed Openings
6372 Palma Del Mar Blvd S, Units 113-316	One or more roof coverings do not meet the minimum requirements	No Attic Access	No Attic Access	Other Roof	No	None or Some Glazed Openings



OIR-B1-1802 RECAPITULATION OF BUILDING MITIGATION FEATURES

Palma Del Mar No. 5 Of St. Petersburg

Building	Roof Covering	Roof Deck Attachment	Roof-Wall Attachment	Roof Shape	SWR	Opening Protection
6372 Palma Del Mar Blvd S, Units 117-320	One or more roof coverings do not meet the minimum requirements		No Attic Access	Other Roof	No	None or Some Glazed Openings
	One or more roof coverings do not meet the minimum requirements		No Attic Access	Other Roof		None or Some Glazed Openings



MIT-BT-II & III RECAPITULATION OF BUILDING MITIGATION FEATURES

Palma Del Mar No. 5 Of St. Petersburg

Building	Roof Covering	Roof Deck Attachment	SWR	Opening Protection
		Concrete Roof		None or Some Glazed Openings





RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

6372 Palma Del Mar Blvd S, Tower H

St. Petersburg, FL 33715

Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128



Felten Property Assessment Team

866.568.7853 | www.fpat.com

RECAPITULATION OF MITIGATION FEATURES For 6372 Palma Del Mar Blvd S, Tower H

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1981 per Pinellas County

Property Appraiser.

2. Roof Covering: One or more roof coverings do not meet the minimum requirements

Comments: This building has multiple types of roof coverings. The concrete tile roof

was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000783. The tar & gravel roof is of unknown age. No permit information was found with the local Building Department. This roof was verified as not meeting the requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: Reinforced Concrete Roof Deck

Comments: Inspection verified a roof structure composed of cast-in-place or pre-cast

structural concrete designed to be self-supporting and integrally

attached to the wall / support system.

4. Roof to Wall Structural

Attachment:

Comments: Inspection verified a roof structure composed of cast-in-place or pre-cast

structural concrete designed to be self-supporting and integrally

attached to the wall / support system.

5. Roof Geometry: Flat Roof

Comments: Inspection verified a flat roof shape.

6. SWR: No

Comments: SWR does not apply to reinforced concrete roof decks.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings

were protected with impact resistant coverings.

Address Verification



Exterior Elevation



Exterior Elevation



Exterior Elevation






Roof Construction




Roof Construction

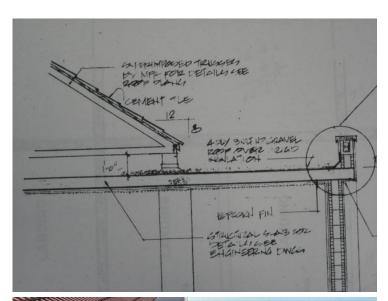






Roof Construction

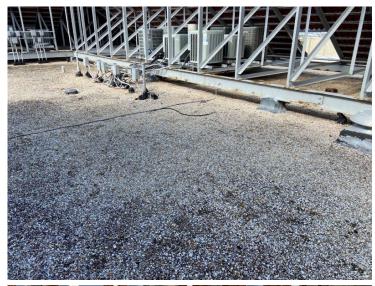



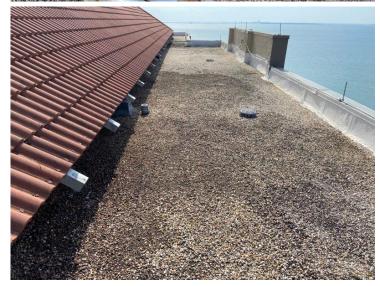

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 2/28/2023	<u> </u>	
Owner Information		
Owner Name: Palma Del Mar Condominiu	m Association No. 5 Of St. Petersburg, Inc.	Contact Person: Scott Fisher
Address: 6372 Palma Del Mar Blvd S, Tow	er H	Home Phone:
City: St. Petersburg	Zip: 33715	Work Phone: (727) 864-0004
County: Pinellas		Cell Phone:
Insurance Company:		Policy #:
Year of Home: 1981	# of Stories: 11	Email: sfisher@resourcepropertymgmt.co

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
X	C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				[]
[X] 2. Concrete/Clay Tile			2006	[]
[] 3. Metal				[]
[X] 4. Built Up				[X]
[] 5. Membrane				[]
[] 6. Other				[]

- [] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- [] B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [X] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- [] D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. Roof Deck Attachment: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Tower H, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

182 ps	f.
	orced Concrete Roof Deck.
[] E. Other:	
[] F. Unknow [] G. No attic	n or unidentified.
	all Attachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within
	e inside or outside corner of the roof in determination of WEAKEST type)
[] A. Toe Nai	
	[] Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
	[] Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal co	onditions to qualify for categories B, C, or D. All visible metal connectors are:
	[]Secured to truss/rafter with a minimum of three (3) nails, and []Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
[] B. Clips	
	[] Metal connectors that do not wrap over the top of the truss/rafter, or
.	[] Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
[] C. Single V	Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a
	minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double	
	[] Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or [] Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
[X] E. Structi	aral Anchor bolts structurally connected or reinforced concrete roof.
[] F. Other:	
	n or unidentified
[] H. No attic	access
	netry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of ucture over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roo	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[X] B. Flat R	
[] C. Other R	
	Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)
sheatl	lso called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the ning or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling
from [X] B. No SV	water intrusion in the event of roof covering loss.
	vn or undetermined.

or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Tower H, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	X	Χ		Χ
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				Χ	·

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
 - ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 - [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - □ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 □ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 □ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- [] <u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

- ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
- ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Tower H, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

[] N. Exterior Opening Protection (unverified shutter systematics) protective coverings not meeting the requirements of	Answer "A", "B", or C" or	
"B" with no documentation of compliance (Level N in	, and the second se	
□ N.1 All Non-Glazed openings classified as Level A, B, C, or		
□ N.2 One or More Non-Glazed openings classified as Level D table above	in the table above, and no Nor	n-Glazed openings classified as Level X in the
☐ N.3 One or More Non-Glazed openings is classified as Level		
[X] X. None or Some Glazed Openings One or more Glazed of	ppenings classified and Leve	el X in the table above.
MITIGATION INSPECTIONS MUST B. Section 627.711(2), Florida Statutes, provid	~	
Qualified Inspector Name: John Felten	License Type: CBC	License or Certificate #: CBC1255984
Inspection Company: Felten Property Assessment Team		Phone: 866-568-7853
Qualified Inspector – I hold an active license as a:	(check one)	
Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board at	who has completed the statuto	•
 □ Building code inspector certified under Section 468.607, Florida S □ General, building or residential contractor licensed under Section 4 		
Professional engineer licensed under Section 471.015, Florida Stat	tutes.	
☐ Professional architect licensed under Section 481.213, Florida Stat	tutes.	
Any other individual or entity recognized by the insurer as possess verification form pursuant to Section 627.711(2), Florida Statutes.		s to properly complete a uniform mitigation
Individuals other than licensed contractors licensed under S under Section 471.015, Florida Statues, must inspect the stru	ictures personally and not	through employees or other persons.
Licensees under s.471.015 or s.489.111 may authorize a direction experience to conduct a mitigation verification inspection.	ct employee who possesses	the requisite skill, knowledge, and
I, <u>John Felten</u> am a qualified inspector and I contractors and professional engineers only) I had my employ and I agree to be responsible for his/her work.		
Qualified Inspector Signature: Date	: <u>2/28/2023</u>	
An individual or entity who knowingly or through gross neging is subject to investigation by the Florida Division of Insurance		
appropriate licensing agency or to criminal prosecution. (Sec		
certifies this form shall be directly liable for the misconduct	of employees as if the auth	norized mitigation inspector personally
performed the inspection.		
<u>Homeowner to complete:</u> I certify that the named Qualified residence identified on this form and that proof of identification		
Signature:	Date:	
An individual or entity who knowingly provides or utters a	folso or fraudulant mitica	tion varification form with the intent to
obtain or receive a discount on an insurance premium to w		
misdemeanor of the first degree. (Section 627.711(7), Florid		

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Tower H, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Windstorm Mitigation Report (OIR-B1-1802)

Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.
6372 Palma Del Mar Blvd S, Units 101-304
St. Petersburg, FL 33715

Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128



RECAPITULATION OF MITIGATION FEATURES For 6372 Palma Del Mar Blvd S, Units 101-304

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1981 per Pinellas County

Property Appraiser.

2. Roof Covering: One or more roof coverings do not meet the minimum requirements

Comments: This building has multiple types of roof coverings. The concrete tile roof

was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000783. The tar & gravel roof is of unknown age. No permit information was found with the local Building Department. This roof was verified as not meeting the requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: No Attic Access

Comments: Due to no attic access, the Roof Deck Attachment could not be

determined.

4. Roof to Wall No Attic Access

Attachment:

Comments: Due to no attic access, the Roof to Wall Attachment could not be

determined.

5. Roof Geometry: Other Roof

Comments: Inspection verified a combination of 33% flat and 67% hip roof shapes,

refer to attached photographs.

6. SWR: No.

Comments: No SWR verified.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings

were protected with impact resistant coverings.

Address Verification



Exterior Elevation



Exterior Elevation



Exterior Elevation

Roof Construction







Roof Construction

Opening Protection





Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 2/28/2023		
Owner Information		
Owner Name: Palma Del Mar Condominiu	m Association No. 5 Of St. Petersburg, Inc.	Contact Person: Scott Fisher
Address: 6372 Palma Del Mar Blvd S, Unit	s 101-304	Home Phone:
City: St. Petersburg	Zip: 33715	Work Phone: (727) 864-0004
County: Pinellas		Cell Phone:
Insurance Company:		Policy #:
Year of Home: 1981	# of Stories: 3	Email: sfisher@resourcepropertymgmt.co

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
X	C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				[]
[X] 2. Concrete/Clay Tile			2006	[]
[] 3. Metal				[]
[X] 4. Built Up				[X]
[] 5. Membrane				[]
[] 6. Other				[]

- [] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- [] B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [X] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- [] D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. Roof Deck Attachment: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 101-304, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

182 psf.	nce than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
D. Reinforced Concre	te Roof Deck.
E. Other:F. Unknown or unider	atified
[X] G. No attic access.	illined.
4. Roof to Wall Attachi	nent: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within outside corner of the roof in determination of WEAKEST type)
[] A. Toe Nails	outside corner of the roof in determination of WLAREST type)
[] Truss	/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the e of the wall, or
[] Metal	connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal conditions t	o qualify for categories B, C, or D. All visible metal connectors are:
	ed to truss/rafter with a minimum of three (3) nails, and
	ned to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
[] B. Clips	
[] Meta	I connectors that do not wrap over the top of the truss/rafter, or I connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail requirements of C or D, but is secured with a minimum of 3 nails.
C. Single Wraps	requirements of C of B, out is secured with a minimum of S hans.
Me mir	tal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a nimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double Wraps	
beam, o minimu [] Metal	Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a m of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on les, and is secured to the top plate with a minimum of three nails on each side.
	polts structurally connected or reinforced concrete roof.
[] F. Other:	
[] G. Unknown or unider	ntified
[X] H. No attic access	
	at is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[] B. Flat Roof	Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[X] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
[] A. SWR (also called S sheathing or foar from water intrusting [X] B. No SWR.	sistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) lealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the madhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling sion in the event of roof covering loss.
[] C. Unknown or undete	ermined.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 101-304, St. Petersburg

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

	ening Protection Level Chart		Non-Glazed Openings				
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	X	Χ		Χ
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IN	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				Χ	·

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N,
 - or X in the table above [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 and ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 - ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

[] <u>C.</u>	Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB
	meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
	☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

		C		ŕ			C		
C.2 One or More Non	-Glaz	zed openings clas	sified as Level D is	n the table above	, and no Non	ı-Glaz	zed openings classified	l as Level N	or X ir
the table above									

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 101-304, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

[] N. Exterior Opening Protection (unverified shutter system) protective coverings not meeting the requirements of "B" with no documentation of compliance (Level N is	Answer "A", "B", or C" or								
N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist									
☐ N.2 One or More Non-Glazed openings classified as Level I table above	O in the table above, and no No	on-Glazed openings classified as Level X in the							
☐ N.3 One or More Non-Glazed openings is classified as Leve	l X in the table above								
[X] X. None or Some Glazed Openings One or more Glazed		rel X in the table above.							
MITIGATION INSPECTIONS MUST E Section 627.711(2), Florida Statutes, provi									
Qualified Inspector Name: John Felten	License Type: CBC	License or Certificate #: CBC1255984							
Inspection Company: Felten Property Assessment Team		Phone: 866-568-7853							
Qualified Inspector – I hold an active license as a:	(check one)								
Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board	and completion of a proficiency								
 □ Building code inspector certified under Section 468.607, Florida □ General, building or residential contractor licensed under Section 									
☐ Professional engineer licensed under Section 471.015, Florida Sta	itutes.								
☐ Professional architect licensed under Section 481.213, Florida Sta	itutes.								
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statutes		ns to properly complete a uniform mitigation							
Individuals other than licensed contractors licensed under Sunder Section 471.015, Florida Statues, must inspect the structure Licensees under s.471.015 or s.489.111 may authorize a direct experience to conduct a mitigation verification inspection. I,	uctures personally and no ect employee who possesses personally performed the	t through employees or other persons. s the requisite skill, knowledge, and e inspection or (licensed							
Je A									
Qualified Inspector Signature: Date	e: <u>2/28/2023</u>								
An individual or entity who knowingly or through gross near is subject to investigation by the Florida Division of Insurar appropriate licensing agency or to criminal prosecution. (See certifies this form shall be directly liable for the misconduct performed the inspection.	ce Fraud and may be sub ection 627.711(4)-(7), Flori	ject to administrative action by the da Statutes) The Qualified Inspector who							
Homeowner to complete: I certify that the named Qualifie	d Inspector or his or her em	unlovee did perform an inspection of the							
residence identified on this form and that proof of identification									
Signature:	Date:								
An individual or entity who knowingly provides or utters									
obtain or receive a discount on an insurance premium to v									
misdemeanor of the first degree. (Section 627.711(7), Flori		-							

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 101-304, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Windstorm Mitigation Report (OIR-B1-1802)

Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc. 6372 Palma Del Mar Blvd S, Units 105-308 St. Petersburg, FL 33715

Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128



RECAPITULATION OF MITIGATION FEATURES For 6372 Palma Del Mar Blvd S, Units 105-308

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1981 per Pinellas County

Property Appraiser.

2. Roof Covering: One or more roof coverings do not meet the minimum requirements

Comments: This building has multiple types of roof coverings. The concrete tile roof

was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000784. The tar & gravel roof is of unknown age. No permit information was found with the local Building Department. This roof was verified as not meeting the requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: No Attic Access

Comments: Due to no attic access, the Roof Deck Attachment could not be

determined.

4. Roof to Wall No Attic Access

Attachment:

Comments: Due to no attic access, the Roof to Wall Attachment could not be

determined.

5. Roof Geometry: Other Roof

Comments: Inspection verified a combination of 33% flat and 67% hip roof shapes,

refer to attached photographs.

6. SWR: No.

Comments: No SWR verified.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings


were protected with impact resistant coverings.

Address Verification



Exterior Elevation

Exterior Elevation

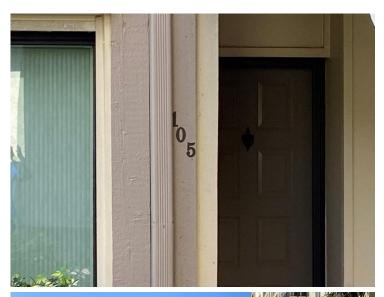






Roof Construction



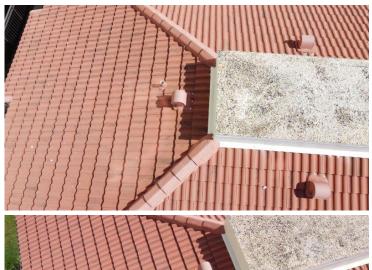




Roof Construction







Opening Protection

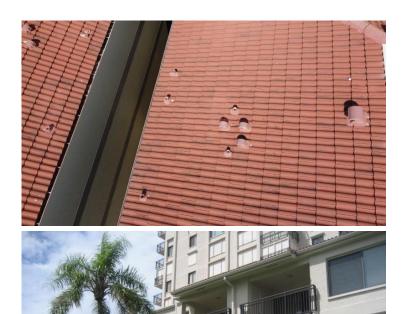

Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 2/28/2023	•								
Owner Information									
Owner Name: Palma Del Mar Condominiu	Contact Person: Scott Fisher								
Address: 6372 Palma Del Mar Blvd S, Unit	Home Phone:								
City: St. Petersburg	Zip: 33715	Work Phone: (727) 864-0004							
County: Pinellas		Cell Phone:							
Insurance Company:		Policy #:							
Year of Home: 1981	# of Stories: 3	Email: sfisher@resourcepropertymgmt.co							

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

١.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
]	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
]	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
X	C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				[]
[X] 2. Concrete/Clay Tile			2006	[]
[] 3. Metal				[]
[X] 4. Built Up				[X]
[] 5. Membrane				[]
[] 6. Other				[]

- [] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- [] B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [X] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- [] D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. Roof Deck Attachment: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 105-308, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

182 psf.	nce than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
D. Reinforced Concre	te Roof Deck.
E. Other:F. Unknown or unider	atified
[X] G. No attic access.	illined.
4. Roof to Wall Attachi	nent: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within outside corner of the roof in determination of WEAKEST type)
[] A. Toe Nails	outside corner of the roof in determination of WLAREST type)
[] Truss	/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the e of the wall, or
[] Metal	connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal conditions t	o qualify for categories B, C, or D. All visible metal connectors are:
	ed to truss/rafter with a minimum of three (3) nails, and
	ned to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
[] B. Clips	
[] Meta	I connectors that do not wrap over the top of the truss/rafter, or I connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail requirements of C or D, but is secured with a minimum of 3 nails.
C. Single Wraps	requirements of C of B, out is secured with a minimum of S hans.
Me mir	tal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a nimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double Wraps	
beam, o minimu [] Metal	Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a m of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on les, and is secured to the top plate with a minimum of three nails on each side.
	polts structurally connected or reinforced concrete roof.
[] F. Other:	
[] G. Unknown or unider	ntified
[X] H. No attic access	
	at is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[] B. Flat Roof	Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[X] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
[] A. SWR (also called S sheathing or foar from water intrusting [X] B. No SWR.	sistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) lealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the madhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling sion in the event of roof covering loss.
[] C. Unknown or undete	ermined.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 105-308, St. Petersburg

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

	ening Protection Level Chart		Glazed O	Non-Glazed Openings			
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Х		Χ
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IV	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				Χ	

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
 - ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 - [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - □ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 □ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 □ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- [] <u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

	C.1	All Non-	-Glazed	openings	classified	as A, B	, or C i	n the table	e above,	or no	Non-Glaze	d openings	exist
--	-----	----------	---------	----------	------------	---------	----------	-------------	----------	-------	-----------	------------	-------

- ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
- ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 105-308, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

[] N. Exterior Opening Protection (unverified shutter systematics) protective coverings not meeting the requirements of		
"B" with no documentation of compliance (Level N in		,
☐ N.1 All Non-Glazed openings classified as Level A, B, C, or	N in the table above, or no No	on-Glazed openings exist
☐ N.2 One or More Non-Glazed openings classified as Level D table above	in the table above, and no No	on-Glazed openings classified as Level X in the
☐ N.3 One or More Non-Glazed openings is classified as Level	X in the table above	
[X] X. None or Some Glazed Openings One or more Glazed of	penings classified and Lev	vel X in the table above.
MITIGATION INSPECTIONS MUST B	E CEDTIEIED DV A OUA	I IEIED INCDECTOD
Section 627.711(2), Florida Statutes, provid	~	
Qualified Inspector Name: John Felten	License Type: CBC	License or Certificate #: CBC1255984
Inspection Company: Felten Property Assessment Team	71	Phone: 866-568-7853
inspection company. Telen Property Assessment Team		1 Holle. 666-566-7655
Qualified Inspector – I hold an active license as a:	(check one)	
Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board at	•	•
 □ Building code inspector certified under Section 468.607, Florida S □ General, building or residential contractor licensed under Section 4 		
Professional engineer licensed under Section 471.015, Florida Stat	tutes.	
☐ Professional architect licensed under Section 481.213, Florida Stat	tutes.	
Any other individual or entity recognized by the insurer as possess verification form pursuant to Section 627.711(2), Florida Statutes.		ons to properly complete a uniform mitigation
Individuals other than licensed contractors licensed under S		
under Section 471.015, Florida Statues, must inspect the stru		
Licensees under s.471.015 or s.489.111 may authorize a direction experience to conduct a mitigation verification inspection.	et employee who possesse	es the requisite skill, knowledge, and
		a inspection on (Easter 1
I, <u>John Felten</u> am a qualified inspector and I contractors and professional engineers only) I had my employ		
and I agree to be responsible for his/her work.	(<u>214410)</u> post	
Qualified Inspector Signature: Date	: 2/28/2023	
Ç		
An individual or entity who knowingly or through gross neg		
is subject to investigation by the Florida Division of Insurance appropriate licensing agency or to criminal prosecution. (See		
certifies this form shall be directly liable for the misconduct		
performed the inspection.		
Homeowner to complete: I certify that the named Qualified residence identified on this form and that proof of identification		
Signature:	Date:	
An individual or entity who knowingly provides or utters a	folce or frondulant mitic	votion varification form with the intent to
obtain or receive a discount on an insurance premium to w		
misdemeanor of the first degree, (Section 627.711(7), Florid		•

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 105-308, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

St. Petersburg, FL 33715

As of 2/28/2023 | FPAT File# MUD2319128



Felten Property Assessment Team

RECAPITULATION OF MITIGATION FEATURES For 6372 Palma Del Mar Blvd S, Units 109-312

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1981 per Pinellas County

Property Appraiser.

2. Roof Covering: One or more roof coverings do not meet the minimum requirements

Comments: This building has multiple types of roof coverings. The concrete tile roof

was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000789. The tar & gravel roof is of unknown age. No permit information was found with the local Building Department. This roof was verified as not meeting the requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: Level B

Comments: Inspection verified 3/4" plywood roof deck attached with 8d nails at a

minimum of 6" on the edge & 12" in the field.

4. Roof to Wall Toe Nails

Attachment:

Comments: Inspection verified embedded straps fastened with less than three nails.

5. Roof Geometry: Other Roof

Comments: Inspection verified a combination of 33% flat and 67% hip roof shapes,

refer to attached photographs.

6. SWR: No

Comments: No SWR verified.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings

were protected with impact resistant coverings.

Address Verification



Exterior Elevation



Exterior Elevation




Exterior Elevation



Roof Construction







Roof Construction







Roof Construction







Roof Construction

Opening Protection







Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

17		· · · · · · · · · · · · · · · · · · ·			
Inspection Date: 2/28/2023					
Owner Information					
Owner Name: Palma Del Mar Condominiu	Owner Name: Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc. Contact Person: Scott Fisher				
Address: 6372 Palma Del Mar Blvd S, Unit	Home Phone:				
City: St. Petersburg	Zip: 33715	Work Phone: (727) 864-0004			
County: Pinellas		Cell Phone:			
Insurance Company:		Policy #:			
Year of Home: 1981	# of Stories: 3	Email: sfisher@resourcepropertymgmt.co			

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
X	C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				
[X] 2. Concrete/Clay Tile			2006	[]
[] 3. Metal				[]
[X] 4. Built Up				[X]
[] 5. Membrane				[]
[] 6. Other				[]

- [] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- [] B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [X] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- [] D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. Roof Deck Attachment: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [X] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 109-312, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

	182 psf.
	D. Reinforced Concrete Roof Deck.
	E. Other:
	F. Unknown or unidentified.
	G. No attic access.
	Roof to Wall Attachment: What is the WEAKEST roof to wall connection? (Do not include attachment of hip/valley jacks within 5 feet of the inside or outside corner of the roof in determination of WEAKEST type)
$[\Lambda]$	A. Toe Nails [] Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the
	top plate of the wall, or [X] Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
	•
	Minimal conditions to qualify for categories B, C, or D. All visible metal connectors are:
	[]Secured to truss/rafter with a minimum of three (3) nails, and []Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
[]	B. Clips
п	[] Metal connectors that do not wrap over the top of the truss/rafter, or [] Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail position requirements of C or D, but is secured with a minimum of 3 nails.
Ц,	C. Single Wraps Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a
	minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
П :	D. Double Wraps
	[] Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or [] Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side. E. Structural Anchor bolts structurally connected or reinforced concrete roof.
	F. Other:
	G. Unknown or unidentified
	H. No attic access
	Roof Geometry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of the host structure over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] .	A. Hip Roof Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
	B. Flat Roof Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[X]	C. Other Roof Any roof that does not qualify as either (A) or (B) above.
6	Secondary Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)
[] .	A. SWR (also called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sheathing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling from water intrusion in the event of roof covering loss.
	B. No SWR.
Ш	C. Unknown or undetermined.

or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 109-312, St. Petersburg

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
openi form	Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.			Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Х		Χ
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	- System Community of the Community of t						
С							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IV	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection					Χ	

- [] <u>A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only)</u> All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
 - ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 - [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] <u>B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only)</u> All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)

C 1 All Non-Glazed openings classified as A B or C in the table above, or no Non-Glazed openings exist

- □ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 □ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
- ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

[] C. Exter	erior Opening Protection- Wood Structural Panels meeting FBC 20	07 All Glazed openings are covered with plywood/OSB
n	meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C	in the table above).

ш	C.1 7th 16th-Glazed openings classified as 7t, B, of C in the table above, of no 16th-Glazed openings calst
	C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in
	the table above

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 109-312, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

N. Exterior Opening Protection (unverified shutter syst protective coverings not meeting the requirements of	Answer "A", "B", or C" o				
"B" with no documentation of compliance (Level N i	<i>'</i>	GI I			
	N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist				
□ N.2 One or More Non-Glazed openings classified as Level D table above	on the table above, and no No	n-Glazed	openings classified as Level X in the		
☐ N.3 One or More Non-Glazed openings is classified as Level					
[X] X. None or Some Glazed Openings One or more Glazed of	openings classified and Lev	el X in th	ne table above.		
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi					
Qualified Inspector Name: John Felten	License Type: CBC		License or Certificate #: CBC1255984		
Inspection Company: Felten Property Assessment Team		Phone:	866-568-7853		
Qualified Inspector – I hold an active license as a:	(check one)				
Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board a			er of hours of hurricane mitigation		
 □ Building code inspector certified under Section 468.607, Florida S □ General, building or residential contractor licensed under Section 					
Professional engineer licensed under Section 471.015, Florida Sta	tutes.				
Professional architect licensed under Section 481.213, Florida Sta	tutes.				
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statutes		ns to prop	erly complete a uniform mitigation		
Individuals other than licensed contractors licensed under Sunder Section 471.015, Florida Statues, must inspect the structure structures under s.471.015 or s.489.111 may authorize a direct experience to conduct a mitigation verification inspection.	uctures personally and no	t throug	h employees or other persons.		
	I, <u>John Felten</u> am a qualified inspector and I personally performed the inspection or (<i>licensed contractors and professional engineers only</i>) I had my employee (<u>Bradley Smith</u>) perform the inspection				
KAL					
Qualified Inspector Signature: Date	e: <u>2/28/2023</u>				
An individual or entity who knowingly or through gross negis subject to investigation by the Florida Division of Insuran appropriate licensing agency or to criminal prosecution. (Secertifies this form shall be directly liable for the misconduct performed the inspection.	ce Fraud and may be sub ction 627.711(4)-(7), Flori	ject to ac da Statu	dministrative action by the ttes) The Qualified Inspector who		
Homeowner to complete: I certify that the named Qualifie	d Inspector or his or her em	ployee d	id perform an inspection of the		
residence identified on this form and that proof of identification	-		-		
Signature:	Date:				
An individual or entity who knowingly provides or utters a	false or fraudulent mitig	ation vei	rification form with the intent to		
obtain or receive a discount on an insurance premium to w	hich the individual or ent				
misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)					

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 109-312, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128



Felten Property Assessment Team

866.568.7853 | www.fpat.com

RECAPITULATION OF MITIGATION FEATURES For 6372 Palma Del Mar Blvd S, Units 113-316

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1981 per Pinellas County

Property Appraiser.

2. Roof Covering: One or more roof coverings do not meet the minimum requirements

Comments: This building has multiple types of roof coverings. The concrete tile roof

was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000788. The tar & gravel roof is of unknown age. No permit information was found with the local Building Department. This roof was verified as not meeting the requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: No Attic Access

Comments: Due to no attic access the Roof Deck Attachment could not be

determined.

4. Roof to Wall No Attic Access

Attachment:

Comments: Due to no attic access the Roof to Wall Attachment could not be

determined.

5. Roof Geometry: Other Roof

Comments: Inspection verified a combination of 33% flat and 67% hip roof shapes,

refer to attached photographs.

6. SWR: No.

Comments: No SWR verified.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings

were protected with impact resistant coverings.

Address Verification



Exterior Elevation



Exterior Elevation




Exterior Elevation



Exterior Elevation





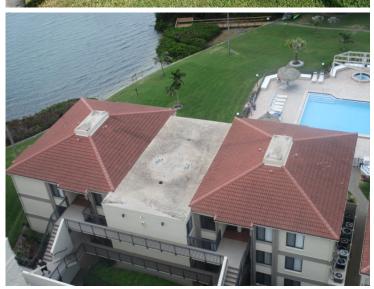

Roof Construction







Roof Construction

Opening Protection







Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 2/28/2023	<u> </u>				
Owner Information					
Owner Name: Palma Del Mar Condominiu	Owner Name: Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc. Contact Person: Scott Fisher				
Address: 6372 Palma Del Mar Blvd S, Unit	Home Phone:				
City: St. Petersburg	Zip: 33715	Work Phone: (727) 864-0004			
County: Pinellas		Cell Phone:			
Insurance Company:		Policy #:			
Year of Home: 1981	# of Stories: 3	Email: sfisher@resourcepropertymgmt.co			

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
X	C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				[]
[X] 2. Concrete/Clay Tile			2006	[]
[] 3. Metal				[]
[X] 4. Built Up				[X]
[] 5. Membrane				[]
[] 6. Other				[]

- [] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- [] B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [X] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- [] D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. Roof Deck Attachment: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 113-316, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

182 psf.	nce than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
D. Reinforced Concre	te Roof Deck.
E. Other:F. Unknown or unider	atified
[X] G. No attic access.	illined.
4. Roof to Wall Attachi	nent: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within outside corner of the roof in determination of WEAKEST type)
[] A. Toe Nails	outside corner of the roof in determination of WLAREST type)
[] Truss	/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the e of the wall, or
[] Metal	connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal conditions t	o qualify for categories B, C, or D. All visible metal connectors are:
	ed to truss/rafter with a minimum of three (3) nails, and
	ned to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
[] B. Clips	
[] Meta	I connectors that do not wrap over the top of the truss/rafter, or I connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail requirements of C or D, but is secured with a minimum of 3 nails.
C. Single Wraps	requirements of C of B, out is secured with a minimum of S hans.
Me mir	tal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a nimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double Wraps	
beam, o minimu [] Metal	Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a m of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on les, and is secured to the top plate with a minimum of three nails on each side.
	polts structurally connected or reinforced concrete roof.
[] F. Other:	
[] G. Unknown or unider	ntified
[X] H. No attic access	
	at is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[] B. Flat Roof	Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[X] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
[] A. SWR (also called S sheathing or foar from water intrusting [X] B. No SWR.	sistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) lealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the madhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling sion in the event of roof covering loss.
[] C. Unknown or undete	ermined.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 113-316, St. Petersburg

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart		Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.			Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	X	Χ		Χ
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
N	Opening Protection products that appear to be A or B but are not verified						
IV	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				Χ	·

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
 - ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 - [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] <u>B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only)</u> All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - □ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 □ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 - ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

[]	C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB
	meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
	☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in
the table above

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 113-316, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

N. Exterior Opening Protection (unverified shutter system) protective coverings not meeting the requirements of the control o	f Answer "A", "B", or C" o		
"B" with no documentation of compliance (Level N	,	Cl	
 □ N.1 All Non-Glazed openings classified as Level A, B, C, o □ N.2 One or More Non-Glazed openings classified as Level 			
table above	D in the table above, and no No	ni-Giazeu	openings classified as Level A in the
☐ N.3 One or More Non-Glazed openings is classified as Lev			
X] X. None or Some Glazed Openings One or more Glazed	openings classified and Lev	el X in t	he table above.
MITIGATION INSPECTIONS MUST A Section 627.711(2), Florida Statutes, prov			
Qualified Inspector Name: John Felten	License Type: CBC		License or Certificate #: CBC1255984
Inspection Company: Felten Property Assessment Team	1	Phone:	866-568-7853
Qualified Inspector – I hold an active license as a	: (check one)		
Home inspector licensed under Section 468.8314, Florida Statute training approved by the Construction Industry Licensing Board			er of hours of hurricane mitigation
 □ Building code inspector certified under Section 468.607, Florida □ General, building or residential contractor licensed under Section 			
Professional engineer licensed under Section 471.015, Florida Se	atutes.		
Professional architect licensed under Section 481.213, Florida Se	atutes.		
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statute		ns to prop	perly complete a uniform mitigation
Individuals other than licensed contractors licensed under under Section 471.015, Florida Statues, must inspect the staticensees under s.471.015 or s.489.111 may authorize a direxperience to conduct a mitigation verification inspection.	ructures personally and no ect employee who possesse	t throug s the req	h employees or other persons. uisite skill, knowledge, and
f, am a qualified inspector and contractors and professional engineers only) I had my employed I agree to be responsible for his/her work.			
R.A.			
Qualified Inspector Signature: Day	te: <u>2/28/2023</u>		
An individual or entity who knowingly or through gross ness subject to investigation by the Florida Division of Insural appropriate licensing agency or to criminal prosecution. (Secretifies this form shall be directly liable for the misconductor operformed the inspection.	nce Fraud and may be sub ection 627.711(4)-(7), Flori	ject to a ida Statu	dministrative action by the ttes) The Qualified Inspector who
Homeowner to complete: I certify that the named Qualific residence identified on this form and that proof of identification			
Signature:	Date:		
An individual or entity who knowingly provides or utters obtain or receive a discount on an insurance premium to misdemeanor of the first degree. (Section 627.711(7), Flor	which the individual or ent		

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 113-316, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128



Felten Property Assessment Team

866.568.7853 | www.fpat.com

RECAPITULATION OF MITIGATION FEATURES For 6372 Palma Del Mar Blvd S, Units 117-320

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1981 per Pinellas County

Property Appraiser.

2. Roof Covering: One or more roof coverings do not meet the minimum requirements

Comments: This building has multiple types of roof coverings. The concrete tile roof

was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000785. The tar & gravel roof is of unknown age. No permit information was found with the local Building Department. This roof was verified as not meeting the requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: No Attic Access

Comments: Due to no attic access the Roof Deck Attachment could not be

determined.

4. Roof to Wall No Attic Access

Attachment:

Comments: Due to no attic access the Roof to Wall Attachment could not be

determined.

5. Roof Geometry: Other Roof

Comments: Inspection verified a combination of 33% flat and 67% hip roof shapes,

refer to attached photographs.

6. SWR: No.

Comments: No SWR verified.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings

were protected with impact resistant coverings.

Address Verification



Exterior Elevation







Exterior Elevation









Roof Construction

Roof Construction

Opening Protection







Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 2/28/2023		
Owner Information		
Owner Name: Palma Del Mar Condominiu	m Association No. 5 Of St. Petersburg, Inc.	Contact Person: Scott Fisher
Address: 6372 Palma Del Mar Blvd S, Unit	s 117-320	Home Phone:
City: St. Petersburg	Zip: 33715	Work Phone: (727) 864-0004
County: Pinellas		Cell Phone:
Insurance Company:		Policy #:
Year of Home: 1981	# of Stories: 3	Email: sfisher@resourcepropertymgmt.co

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
[]	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
ſΧ	C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				
[X] 2. Concrete/Clay Tile			2006	
[] 3. Metal				[]
[X] 4. Built Up				[X]
[] 5. Membrane				[]
[] 6. Other				[]

- [] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [X] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- [] D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. Roof Deck Attachment: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 117-320, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

182 psf.	nce than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least
D. Reinforced Concre	te Roof Deck.
E. Other:F. Unknown or unider	atified
[X] G. No attic access.	illined.
4. Roof to Wall Attachi	nent: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within outside corner of the roof in determination of WEAKEST type)
[] A. Toe Nails	outside corner of the roof in determination of WLAREST type)
[] Truss	/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the e of the wall, or
[] Metal	connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal conditions t	o qualify for categories B, C, or D. All visible metal connectors are:
	ed to truss/rafter with a minimum of three (3) nails, and
	ned to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
[] B. Clips	
[] Meta	I connectors that do not wrap over the top of the truss/rafter, or I connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail requirements of C or D, but is secured with a minimum of 3 nails.
C. Single Wraps	requirements of C of B, out is secured with a minimum of S hans.
Me mir	tal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a nimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double Wraps	
beam, o minimu [] Metal	Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a m of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on les, and is secured to the top plate with a minimum of three nails on each side.
	polts structurally connected or reinforced concrete roof.
[] F. Other:	
[] G. Unknown or unider	ntified
[X] H. No attic access	
	at is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[] B. Flat Roof	Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[X] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
[] A. SWR (also called S sheathing or foar from water intrusting [X] B. No SWR.	sistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) lealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the madhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling sion in the event of roof covering loss.
[] C. Unknown or undete	ermined.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 117-320, St. Petersburg

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.			Glazed Openings				Non-Glazed Openings	
			Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Х		Χ	
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
N	Opening Protection products that appear to be A or B but are not verified							
IV	Other protective coverings that cannot be identified as A, B, or C							
Х	No Windborne Debris Protection	Χ				Χ		

- [] <u>A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only)</u> All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
 - ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 - [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] <u>B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only)</u> All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)

C 1 All Non-Glazed openings classified as A B or C in the table above, or no Non-Glazed openings exist

- □ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 □ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
- ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

[] <u>C. Exteri</u> o	or Opening Protection-	Wood Structural Panels meet	ing FBC 2007	7 All Glazed openings are c	overed with plywood/OSB
		of Table 1609.1.2 of the FBC 20			

ш	C.1 7th 16th-Glazed openings classified as 7t, B, of C in the table above, of no 16th-Glazed openings calst
	C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in
	the table above

☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 117-320, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

[] N. Exterior Opening Protection (unverified shutter systems with no documentation) All Glazed openings are protected with protective coverings not meeting the requirements of Answer "A", "B", or C" or systems that appear to meet Answer "A" or "B" with no documentation of compliance (Level N in the table above).		
N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist		
N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the table above		
☐ N.3 One or More Non-Glazed openings is classified as Level X in the table above		
[X] X. None or Some Glazed Openings One or more Glazed openings classified and Level X in the table above.		
MITIGATION INSPECTIONS MUST BE CERTIFIED BY A QUALIFIED INSPECTOR. Section 627.711(2), Florida Statutes, provides a listing of individuals who may sign this form.		
Qualified Inspector Name: John Felten	License Type: CBC	License or Certificate #: CBC1255984
Inspection Company: Felten Property Assessment Team		Phone: 866-568-7853
Qualified Inspector – I hold an active license as a: (check one)		
☐ Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam.		
 □ Building code inspector certified under Section 468.607, Florida Statutes. □ General, building or residential contractor licensed under Section 489.111, Florida Statutes. 		
Professional engineer licensed under Section 471.015, Florida Statutes.		
Professional architect licensed under Section 481.213, Florida Statutes.		
Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.		
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons. Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection. I, John Felten am a qualified inspector and I personally performed the inspection or (licensed contractors and professional engineers only) I had my employee (Bradley Smith) perform the inspection		
and I agree to be responsible for his/her work. Qualified Inspector Signature: Date: 2/28/2023		
An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.		
Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.		
Signature:	Date:	
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)		

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspectors Initials Property Address 6372 Palma Del Mar Blvd S, Units 117-320, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128



Felten Property Assessment Team

RECAPITULATION OF MITIGATION FEATURES For 6382 Palma Del Mar Blvd S, Units 121-224

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1981 per Pinellas County

Property Appraiser.

2. Roof Covering: One or more roof coverings do not meet the minimum requirements

Comments: This building has multiple types of roof coverings. The concrete tile roof

was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000787. The tar & gravel roof is of unknown age. No permit information was found with the local Building Department. This roof was verified as not meeting the requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: No Attic Access

Comments: Due to no attic access the Roof Deck Attachment could not be

determined.

4. Roof to Wall No Attic Access

Attachment:

Comments: Due to no attic access the Roof to Wall Attachment could not be

determined.

5. Roof Geometry: Other Roof

Comments: Inspection verified a combination of 33% flat and 67% hip roof shapes,

refer to attached photographs.

6. SWR: No.

Comments: No SWR verified.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings

were protected with impact resistant coverings.

Address Verification



Exterior Elevation



6382

Exterior Elevation



Exterior Elevation



Roof Construction





Roof Construction

Roof Construction

Roof Construction







Roof Construction

Opening Protection





Uniform Mitigation Verification Inspection Form

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 2/28/2023						
Owner Information						
Owner Name: Palma Del Mar Condominiu	Contact Person: Scott Fisher					
Address: 6382 Palma Del Mar Blvd S, Unit	Home Phone:					
City: St. Petersburg	Zip: 33715	Work Phone: (727) 864-0004				
County: Pinellas		Cell Phone:				
Insurance Company:	Policy #:					
Year of Home: 1981	# of Stories: 2	Email: sfisher@resourcepropertymgmt.co				

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photograph must accompany this form to validate each attribute marked in questions 3 though 7. The insurer may ask additional questions regarding the mitigated feature(s) verified on this form.

1.	Building Code : Was the structure built in compliance with the Florida Building Code (FBC 2001 or later) OR for homes located in
	the HVHZ (Miami-Dade or Broward counties), South Florida Building Code (SFBC-94)?
[]	A. Built in compliance with the FBC: Year Built . For homes built in 2002/2003 provide a permit application with a date after
	3/1/2002: Building Permit Application Date (MM/DD/YYYY)
	B. For the HVHZ Only: Built in compliance with the SFBC-94: Year Built For homes built in 1994, 1995, and 1996
	provide a permit application with a date after 9/1/1994: Building Permit Application Date (MM/DD/YYYY)//
ſΧ	C. Unknown or does not meet the requirements of Answer "A" or "B"

2. **Roof Covering:** Select all roof covering types in use. Provide the permit application date OR FBC/MDC Product Approval number OR Year of Original Installation/Replacement OR indicate that no information was available to verify compliance for each roof covering identified.

2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
[] 1. Asphalt/Fiberglass Shingle				
[X] 2. Concrete/Clay Tile			2006	[]
[] 3. Metal				[]
[X] 4. Built Up				[X]
[] 5. Membrane				[]
[] 6. Other				[]

- [] A. All roof coverings listed above meet the FBC with a FBC or Miami-Dade Product Approval listing current at time of installation OR have a roofing permit application date on or after 3/1/02 OR the roof is original and built in 2004 or later.
- B. All roof coverings have a Miami-Dade Product Approval listing current at time of installation OR (for the HVHZ only) a roofing permit application after 9/1/1994 and before 3/1/2002 OR the roof is original and built in 1997 or later.
- [X] C. One or more roof coverings do not meet the requirements of Answer "A" or "B".
- [] D. No roof coverings meet the requirements of Answer "A" or "B".
- 3. Roof Deck Attachment: What is the weakest form of roof deck attachment?
- [] A. Plywood/Oriented strand board (OSB) roof sheathing attached to the roof truss/rafter (spaced a maximum of 24" inches o.c.) by staples or 6d nails spaced at 6" along the edge and 12" in the field. -OR- Batten decking supporting wood shakes or wood shingles. -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that has an equivalent mean uplift less than that required for Options B or C below.
- [] B. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 12" inches in the field.-OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent or greater resistance than 8d nails spaced a maximum of 12 inches in the field or has a mean uplift resistance of at least 103 psf.
- [] C. Plywood/OSB roof sheathing with a minimum thickness of 7/16"inch attached to the roof truss/rafter (spaced a maximum of 24"inches o.c.) by 8d common nails spaced a maximum of 6" inches in the field. -OR- Dimensional lumber/Tongue & Groove decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR- Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

Inspectors Initials Property Address 6382 Palma Del Mar Blvd S, Units 121-224, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

_	er resistance than 8d common halfs spaced a maximum of 6 inches in the field or has a mean upilit resistance of at least
182 psf.	
	ed Concrete Roof Deck.
[] E. Other:	
[] F. Unknown [X] G. No attic	
	<u>Il Attachment</u> : What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within
	inside or outside corner of the roof in determination of WEAKEST type)
[] A. Toe Nails	
	[] Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the top plate of the wall, or
	Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal cor	nditions to qualify for categories B, C, or D. All visible metal connectors are:
willinai coi	[]Secured to truss/rafter with a minimum of three (3) nails, and
	[]Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the
	blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
[] B. Clips	blocking of trussylated and blocked no more than 1.5 of the trussylated, and free of visible severe corrosion.
ц в. спр	[] Metal connectors that do not wrap over the top of the truss/rafter, or
	[] Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail
	position requirements of C or D, but is secured with a minimum of 3 nails.
[] C. Single Wr	
.	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a
	minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double W	
	[] Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond
	beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or
	[] Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on
	both sides, and is secured to the top plate with a minimum of three nails on each side.
[] E. Structural	Anchor bolts structurally connected or reinforced concrete roof.
F. Other:	· · · · · · · · · · · · · · · · · · ·
[] G. Unknown	or unidentified
[X] H. No attic	
	etry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of
	cture over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[] B. Flat Roof	
[] D. Tiat Roof	than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[X] C. Other R	
[A] C. Oulei K	Any roof that does not qualify as either (A) of (B) above.
6. <u>Secondary V</u>	Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)
	o called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the
	ng or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling
	ater intrusion in the event of roof covering loss.
[X] B. No SWI	
[] C. Unknown	or undetermined.

Inspectors Initials Property Address 6382 Palma Del Mar Blvd S, Units 121-224, St. Petersburg

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed Openings				Non-Glazed Openings	
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.			Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors	
N/A	Not Applicable- there are no openings of this type on the structure		X	X	Χ		Χ	
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)							
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)							
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007							
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance							
N	Opening Protection products that appear to be A or B but are not verified							
IV	Other protective coverings that cannot be identified as A, B, or C							
Х	No Windborne Debris Protection	Χ				Χ	·	

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
 - ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 - [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] <u>B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only)</u> All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 <u>and</u> ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - □ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 □ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 □ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- [] <u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
 - meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).

 C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
 - \square C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
 - ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 6382 Palma Del Mar Blvd S, Units 121-224, St. Petersburg

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2319128

N. Exterior Opening Protection (unverified shutter syst protective coverings not meeting the requirements of	Answer "A", "B", or C" or							
"B" with no documentation of compliance (Level N in the table above).								
□ N.2 One or More Non-Glazed openings classified as Level D table above	on the table above, and no No	on-Glazed	openings classified as Level X in the					
☐ N.3 One or More Non-Glazed openings is classified as Level								
[X] X. None or Some Glazed Openings One or more Glazed of	openings classified and Lev	el X in th	ne table above.					
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi								
Qualified Inspector Name: John Felten	License Type: CBC		License or Certificate #: CBC1255984					
Inspection Company: Felten Property Assessment Team		Phone:	866-568-7853					
Qualified Inspector – I hold an active license as a:	(check one)							
Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board a			er of hours of hurricane mitigation					
	Building code inspector certified under Section 468.607, Florida Statutes. General, building or residential contractor licensed under Section 489.111, Florida Statutes.							
Professional engineer licensed under Section 471.015, Florida Sta	tutes.							
Professional architect licensed under Section 481.213, Florida Sta	tutes.							
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statutes		ns to prop	erly complete a uniform mitigation					
Individuals other than licensed contractors licensed under Sunder Section 471.015, Florida Statues, must inspect the structure structure under s.471.015 or s.489.111 may authorize a direct experience to conduct a mitigation verification inspection.	ictures personally and no	t throug	h employees or other persons.					
I, <u>John Felten</u> am a qualified inspector and I contractors and professional engineers only) I had my employ and I agree to be responsible for his/her work.								
KAL								
Qualified Inspector Signature: Date	: <u>2/28/2023</u>							
An individual or entity who knowingly or through gross negis subject to investigation by the Florida Division of Insuran appropriate licensing agency or to criminal prosecution. (Secertifies this form shall be directly liable for the misconduct performed the inspection.	ce Fraud and may be subction 627.711(4)-(7), Flori	ject to ac ida Statu	dministrative action by the ttes) The Qualified Inspector who					
Homeowner to complete: I certify that the named Qualifie	d Inspector or his or her em	nplovee d	id perform an inspection of the					
residence identified on this form and that proof of identification	-		-					
Signature:	Date:							
An individual or entity who knowingly provides or utters a	false or fraudulent mitig	ation ver	rification form with the intent to					
obtain or receive a discount on an insurance premium to w		,						
obtain of receive a discount on an insurance premium to w	hich the individual or ent	tity is not						

The definitions on this form are for inspection purposes only and cannot be used to certify any product or construction feature as offering protection from hurricanes.

Inspectors Initials Property Address 6382 Palma Del Mar Blvd S, Units 121-224, St. Petersburg

*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Windstorm Mitigation Report (MIT-BT II & III)

Palma Del Mar Condominium Assn No. 5 Of St. Petersburg, Inc.
6372 Palma Del Mar Blvd S, Tower H
St. Petersburg, FL 33715

Prepared Exclusively for Palma Del Mar Condominium Association No. 5 Of St. Petersburg, Inc.

As of 2/28/2023 | FPAT File# MUD2319128



Felten Property Assessment Team

866.568.7853 | www.fpat.com

RECAPITULATION OF MITIGATION FEATURES For 6372 Palma Del Mar Blvd S, Tower H

1. Roof Covering: One or more roof coverings do not meet the minimum

requirements

Comments: This building has multiple types of roof coverings. The concrete tile

roof was replaced in 2006. The roof permit was confirmed and the permit number is 06-10000783. The tar & gravel roof is of unknown

age. No permit information was found with the local Building

Department. This roof was verified as not meeting the requirements

outlined on the mitigation affidavit.

2. Roof Deck Attachment: Reinforced Concrete Roof Deck

Comments: Inspection verified a roof structure composed of cast-in-place or pre-

cast structural concrete designed to be self-supporting and integrally

attached to the wall / support system.

3. SWR: No

Comments: SWR does not apply to reinforced concrete roof decks.

4. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some opening protection. Not all glazed openings

were protected with impact resistant coverings.



Address Verification



Exterior Elevation



Exterior Elevation




Exterior Elevation



Roof Construction



Roof Construction

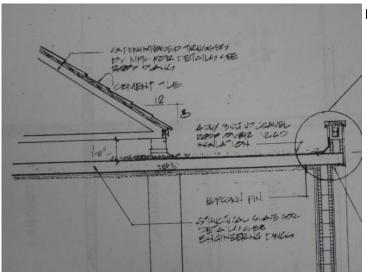

Roof Construction



Roof Construction




Roof Construction



Roof Construction



Roof Construction

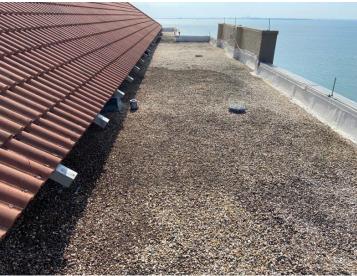

Roof Construction

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # MUD2319128

This Mitigation Inspection Form must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This Inspection Form is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

WIND LOSS MITIGATION INFORMATION				
PREMISES #:	1	SUBJECT OF INSURANCE: Palma Del Mar Condominium Association No. 5 Of POLICY #:		
BUILDING #:	1	STREET ADDRESS: 6372 Palma Del Mar Blvd S, Tower H, St. Petersburg, FL 33715		
# STORIES:	11	BLDG DESCRIPTION:11- Story Residential Condominium Building		
BUILDING TYPE:		[] (4 to 6 stories) [X] (7 or more stories)		

Terrain Exposure Category must be provided for each insured location.

I hereby certify that the building or unit at the address indicated above **TERRAIN EXPOSURE CATEGORY** as defined under the Florida Building Code is (Check One): **[X] Exposure C** or **[] Exposure B**

Certification below for purposes of **TERRAIN EXPOSURE CATEGORY** above does not require personal inspection of the premises.

Certification of Wind Speed is required to establish the basic wind speed of the location (Complete for Terrain B only if Year Built On or After Jan. 1, 2002).

I hereby certify that the basic WIND SPEED of the building or unit at the address indicated above based upon county wind speed lines defined under the Florida Building Code (FBC) is (Check One):

[] ≥100 or [] ≥110 or [X] ≥120

Certification of Wind Design is required when the buildings is constructed in a manner to exceed the basic wind speed design established for the structure location (Complete for Terrain B only if Year Built On or After Jan.1, 2002).

I hereby certify that the building or unit at the address indicated above is designed and mitigated to the Florida Building Code (FBC) WIND DESIGN of (Check One): ☐ ≥100 or ☐ ≥110 or ☐ ≥120

Certification for the purpose of establishing the basic **WIND SPEED or WIND SPEED DESIGN** above does not require personal inspection of the premises.

Specify the type of mitigation device(s) installed:

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photo documenting the existence of each visible and accessible construction or mitigation attribute marked in Sections 1 through 4 must accompany this form.

1. Roof Coverings

Roof Covering Material: Built-up w/ Gravel Date of Installation: Unknown

[X] Level A (Non FBC Equivalent) – Type II or III

One or more roof coverings that do not meet the FBC Equivalent definition below.

Level B (FBC Equivalent) - Type II or III

Single-Ply, Modified Bitumen, Sprayed Polyurethane foam, Metal, Tile, Built-up, Asphalt Shingle or Rolled Roofing, or other roof covering membranes/products that at a minimum meet the 2001 or later Florida Building Code or the 1994 South Florida Building Code and have a Miami-Dade NOA or FBC 2001 Product Approval listing that is/was current at the time of installation.

All mechanical equipment must be adequately tied to the roof deck to resist overturning and sliding during high winds. Any flat roof covering with flashing or coping must be mechanically attached to the structure with face fasteners (no clip/cleat systems), and asphalt roof coverings on flat roofs must be 10 years old or less.

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # MUD2319128

2.	Roof Deck Attachment [] No Attic Access
	Devel A – Wood or Other Deck Type II only
	Roof deck composed of sheets of structural panels (plywood or OSB). <i>Or</i>
	Architectural (non-structural) metal panels that require a solid decking to support weight and loads. Or
	Other roof decks that do not meet Levels B or C below.
	Devel B – Metal Deck Type II or III
	Metal roof deck made of structural panels fastened to open-web steel bar joists and integrally attached to the wall.
	[X] Level C - Reinforced Concrete Roof Deck Type, II or III A roof structure composed of cast-in-place or pre-cast structural concrete designed to be self-supporting and integrally attached to wall/support system.
3.	Secondary Water Resistance [X] None
	[] Underlayment
	A self-adhering polymer modified bitumen roofing underlayment (thin rubber sheets with peel and stick underside located beneath the roof covering and normal felt underlayment) with a minimum width of 6" meeting the requirements of ASTM D 1970 installed over all plywood/OSB joints to protect from water intrusion. All secondary water resistance products must be installed per the manufacturer's recommendations. Roofing felt or similar paper based products are not acceptable for secondary water resistance.
	[] Foamed Adhesive
	A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water intrusion.
4.	Opening Protection [X] None or Some
	[] Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:
	□ SSTD12;
	☐ ASTM E 1886 and ASTM E 1996;
	☐ Miami-Dade PA 201, 202, and 203;
	☐ Florida Building Code TAS 201, 202 and 203.
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.
	Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of:
	☐ ASTM E 1886 and ASTM E 1996
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # MUD2319128

CERTIFICATION

I certify that I hold an active license as a: (CHECK ONE OF THE FOLLOWING)

General or bu	ilding contractor license	d under Section 489.	111, Florida	a Statutes.		
☐ Building code	e inspector certified unde	er Section 468.607, Fl	orida Statu	ites.		
☐ Professional	architect licensed under	Section 481.213, Flo	rida Statute	es.		
☐ Professional	engineer licensed under	Section 471.015, Flor	ida Statute	s.		
, ,	rsonally inspected the premis my professional opinion, base					,
characteristics exist a premium discount on make a health or safe	ction Form and the information it the Location Address listed in insurance provided by Citizety certification or warranty, expression of the undersign of the control of the control of the undersign of the control of the control of the undersign of the control o	above and for the purpos ens Property Insurance xpress or implied, of any	e of permittin Corporation a kind, and not	g the Named Insur and for no other p hing in this Form s	red to receive a property insu ourpose. The undersigned do shall be construed to impose	rance bes not on the
Name of Company:	Felten Property As	ssessment Team		Phone:	(866)-568-7853	
Name of Inspector	John Felten	License Type	СВС	License #	CBC1255984	
nspection Date:	2/28/2023					
Signature:	Je Al			Date:	2/28/2023	
Applicant/Insured's Signature*:				Date:		

^{*}Applicant /Insured's signature must be from the Board President and another member of the board for condo and homeowner's associations or an officer of the named insured for all other business entities.

[&]quot;Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony of the third degree."

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.